



TN-S4

TN-S4 PRODUCT DATA SHEET

The Turf Nation TN-S4 is engineered to be the perfect balance of firm and fast. Available in many vivid colors. TN-S4 products are designed to enhance player safety and its grid layout provides consistent performance




TN-S4 FEATURES



SPECIFICATION	GRASS ZONE	PRODUCTION SPECIFICATIONS
FIBER	TRUE C-8	GRASS ZONE: 41 oz.
FIBER TYPE	SLIT FILM	POLYETHYLENE
FIBER HEIGHT	2.0 INCHES / 51 mm	BACKING: 8 oz.
FIBER DENIER	10,000 DENIER / 11,100 DTEX	SECONDARY BACKING: 26 oz.
FIBER MICRONS	110	TOTAL SYSTEM WEIGHT: 75 oz.
FILAMENT STRUCTURE	7 FIBRILS	STANDARD COLOR: FIELD GREEN & FIELD/LIME
FIBRIL WIDTH	0.05514 INCHES / 1.4 mm	AVAILABLE IN OTHER PILE HEIGHTS

*These specifications are standard and may vary slightly due to manufacturing tolerances or consumer specifications

MAIN GREENS

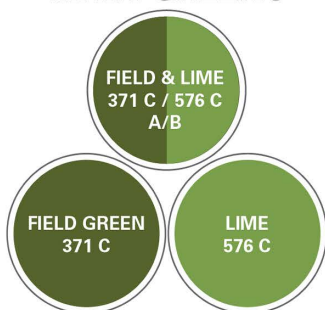

DESIGNER COLOR PALLETTE




*YARN DYE LOTS MAY HAVE SOME VARIATION FROM STATED PANTONE COLORS, PLEASE REQUEST YARN SAMPLES FOR A MORE ACCURATE EXAMPLE OF THE COLORS USED





TN-S4

TN-S4 PRODUCT BACKING SHEET

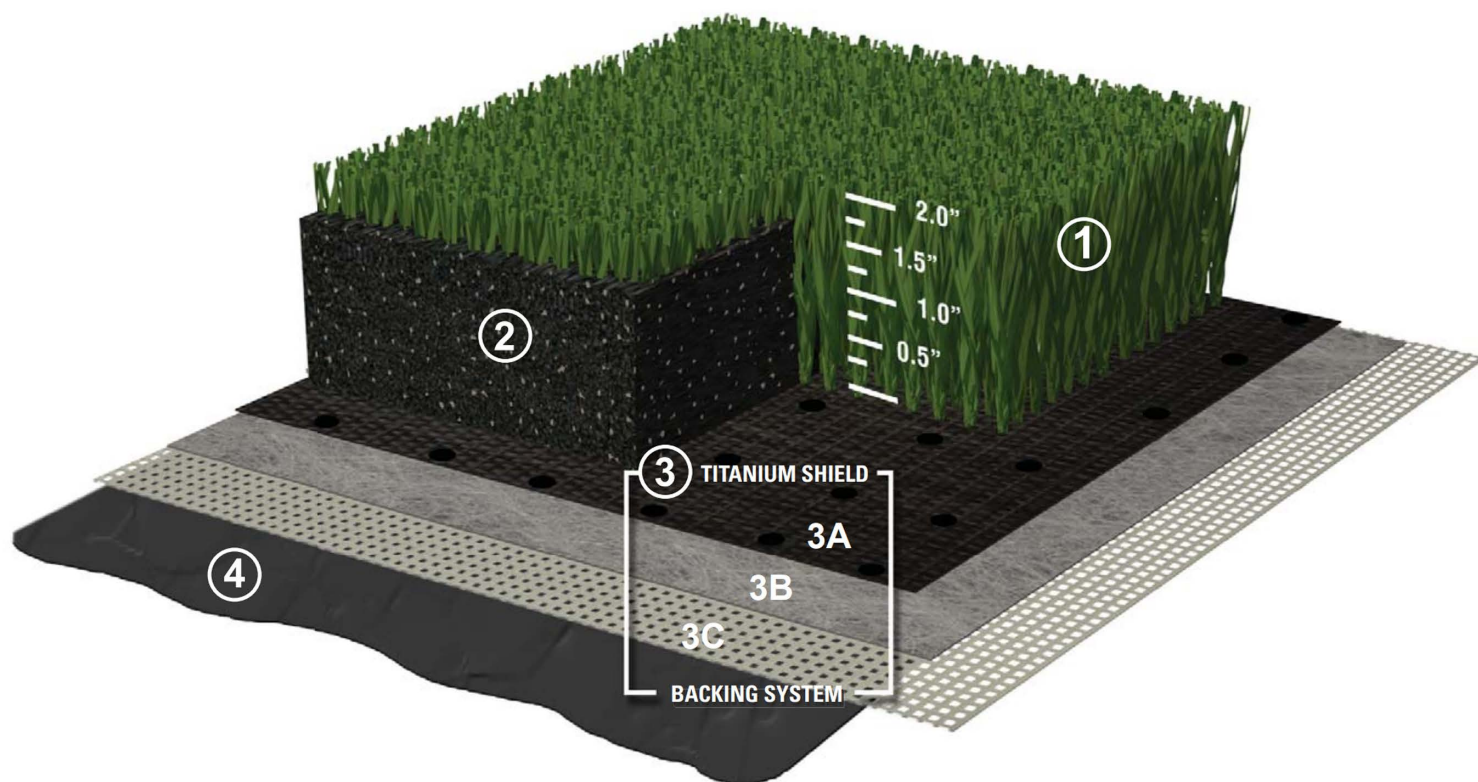

TN-S4 SYNTHETIC TURF SYSTEM

- ① **TN-S4** Parallel Slit Film Turf made with True C-8 Fiber for unsurpassed durability and performance
- ② Specialized infill mixture designed to optimize performance and player safety
- ③ **Titanium Shield Backing System**
Our premier backing system includes multiple layers for long lasting play and performance
 - 3A. Woven 18-Pic Polybac to secure fiber retention
 - 3B. Non-Woven 80-Gram Colbond affords maximum dimensional stability
 - 3C. Woven 5-Pic synthetic layer to enhance seaming properties
- ④ Premium grade urethane coating to ensure a superior tuft bind





TN-S4

TN-S4 PRODUCT DATA SHEET

	TEST CODE	TEST RESULTS	TEST NAME	TEST DESCRIPTION
PERFORMANCE TESTING	ASTM F355-01	Gmax 107 / HIC 314	Gmax Rating	Shock-absorbing properties of playing surface systems and materials
	ASTM F1015-03	17 ± 2	Relative Abrasive Index	Relative abrasiveness of synthetic turf playing surfaces
	ASTM F2117-01	29.8 INCHES / 75.7 cm	Average Ball Rebound Height	Vertical rebound characteristics of sports surface/ball systems; acoustical measurement
	ASTM F2117-01	0.40 (CR)	Coefficient of restitution (CR)	Vertical rebound characteristics of sports surface/ball systems; acoustical measurement
	ASTM F1551-03	34.3 INCHES / 87.1 cm	Average ball bounce	Comprehensive characterization of synthetic turf playing surfaces and materials
	ASTM F1551-03	Static COF: 1.40 / Dynamic 0.90	Soccer shoe traction - Dry	Comprehensive characterization of synthetic turf playing surfaces and materials
	ASTM F1551-03	Static COF: 1.30 / Dynamic: 0.80	Soccer shoe traction - Wet	Comprehensive characterization of synthetic turf playing surfaces and materials
	ASTM F1551-03	Static COF: 1.50 / Dynamic: 1.00	Football shoe traction - Dry	Comprehensive characterization of synthetic turf playing surfaces and materials
	ASTM F1551-03	Static COF: 1.40 / Dynamic: 0.90	Football shoe traction - Wet	Comprehensive characterization of synthetic turf playing surfaces and materials
SYSTEM TESTING	ASTM D5848-07	75 oz Y ² / 2.54 kg M ²	Total Weight	Mass per unit area of pile yarn floor coverings
	ASTM D5848-07	41 oz Y ² / 1.39 kg M ²	Pile Weight	Mass per unit area of pile yarn floor coverings
	ASTM D5848-07	8 oz Y ² / 0.27 kg M ²	Primary Backing Weight	Mass per unit area of pile yarn floor coverings
	ASTM D5848-07	26 oz Y ² / 0.88 kg M ²	Secondary Backing Weight	Mass per unit area of pile yarn floor coverings
	ASTM D5823-05A	2.0 Inches / 51 mm	Pile Height	Turf height of pile floor coverings
	ASTM D1335-05	Exceeds STC Standards	Tuft Bind Strength	Tuft bind of pile yarn floor coverings
	ASTM D5034-09	(MD) 243 lbs force / 1,081 N	Grab Tear Strength	Breaking strength and elongation of textile fabrics (Grab test)
	ASTM D5034-09	(CMD) 227 lbs force / 1,014 N	Grab Tear Strength	Breaking strength and elongation of textile fabrics (Grab test)
	ASTM D5793-05	8 per 3 inches / 8 per 7.6 cm	Stitches per 3 inches	Binding sites per unit length or width of pile yarn floor coverings
	ASTM D5793-05	3/8 inch / 9.5 mm	Machine Gauge	Binding sites per unit length or width of pile yarn floor coverings
	ASTM D2859-06	PASS	Flammability - Pill Burn	Ignition characteristics of finished textile floor covering materials
	ASTM E648-08B	N/A	Flammability - Radiant Panel	Critical radiant flux of floor-covering systems using a radiant heat energy source
	ASTM DF1951-09	PASS	Wheel Chair Accessibility	Determination of accessibility of surface systems under and around playground equipment
	BS7044-METHOD 4	Exceeds 40 Inches (1016 mm) an hr	Infiltration Rate	Infiltration rate-buffered ponding-type infiltrometer
	FIBER TESTING	ASTM D1907-07	10,000 DENIER / 11,100 DTEX	Fiber Denier
ASTM D3218-07		0.00426 Inches / 0.108 mm	Fiber Thickness	Standard specification for polyolefin monofilaments
ASTM D3218-07		0.05514 Inches / 1.4 mm	Fibril Width	Standard specification for polyolefin monofilaments
ASTM D789-07		248° F / 120° C	Fiber Melting Point	Determination of solution viscosities of polyamide (Pa)
ASTM D792-08		0.959	Fiber Specific Gravity	Density and specific gravity (relative density) of plastics by displacement
ASTM D2256-02(2008)		15.81 lbs / 70.326 N	Fiber Breaking Strength	Tensile properties of yarns by the single-strand method
ASTM D2256-02(2008)	64.93%	Fiber Elongation	Tensile properties of yarn by the single-strand method	

*All specifications and results subject to manufacturers tolerances

